



US011535496B2

(12) **United States Patent**
Al-Husseini et al.

(10) **Patent No.:** **US 11,535,496 B2**

(45) **Date of Patent:** **Dec. 27, 2022**

(54) **DEVICE FOR STABILIZING A HOISTED OBJECT**

(56) **References Cited**

(71) Applicant: **Vita Inclinata Technologies, Inc.**,
Broomfield, CO (US)

(72) Inventors: **Mahdi Al-Husseini**, Douglasville, GA
(US); **Joshua Lamar Barnett**,
Douglasville, GA (US); **Anthony Chen**,
Stanford, CA (US)

U.S. PATENT DOCUMENTS

3,210,115 A * 10/1965 Graham B66C 1/32
294/82.15
3,498,476 A * 3/1970 Jettman B66C 13/08
414/754
5,871,249 A * 2/1999 Williams B66C 13/08
294/86.41
8,496,279 B2 * 7/2013 Aoki B66C 13/08
294/82.15
8,938,325 B1 1/2015 McGinnis et al.
9,688,404 B1 6/2017 Buchmueller et al.
2012/0271582 A1 * 10/2012 Bageshwar G01R 33/0035
702/92
2016/0297650 A1 * 10/2016 Bang B66C 13/085

(73) Assignee: **Vita Inclinata Technologies, Inc.**,
Broomfield, CO (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 500 days.

FOREIGN PATENT DOCUMENTS

GB 2467149 A * 7/2010 B66C 13/08
JP H04256686 A 9/1992
JP H07179288 A 7/1995
JP H1111859 A 1/1999
WO WO-2014076189 A1 * 5/2014 B66C 13/085

(21) Appl. No.: **16/360,075**

(22) Filed: **Mar. 21, 2019**

(65) **Prior Publication Data**

US 2019/0359453 A1 Nov. 28, 2019

* cited by examiner

Primary Examiner — Sang K Kim

Assistant Examiner — Nathaniel L Adams

(74) *Attorney, Agent, or Firm* — Martin Spencer
Garthwaite

Related U.S. Application Data

(60) Provisional application No. 62/677,177, filed on May
28, 2018.

(51) **Int. Cl.**
B66C 13/06 (2006.01)

(52) **U.S. Cl.**
CPC **B66C 13/063** (2013.01)


(58) **Field of Classification Search**
CPC B66C 13/04; B66C 13/063; B66C 13/08;
B66C 13/085

See application file for complete search history.

(57) **ABSTRACT**

Disclosed are various embodiments for stabilizing a hoisted object. A hoisted object such as a litter can have a tendency spin while being retrieved on a lift line. A device may be connected to the hoisted object to reduce a spin or other angular velocity of the hoisted object. The device may monitor stability of the hoisted object and determine that the hoisted object is unstable. The device may be configured to rotate at least one flywheel to apply torque to an enclosure of the device.

12 Claims, 3 Drawing Sheets

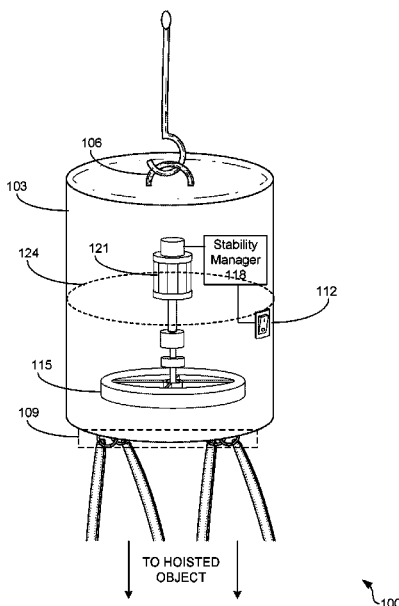

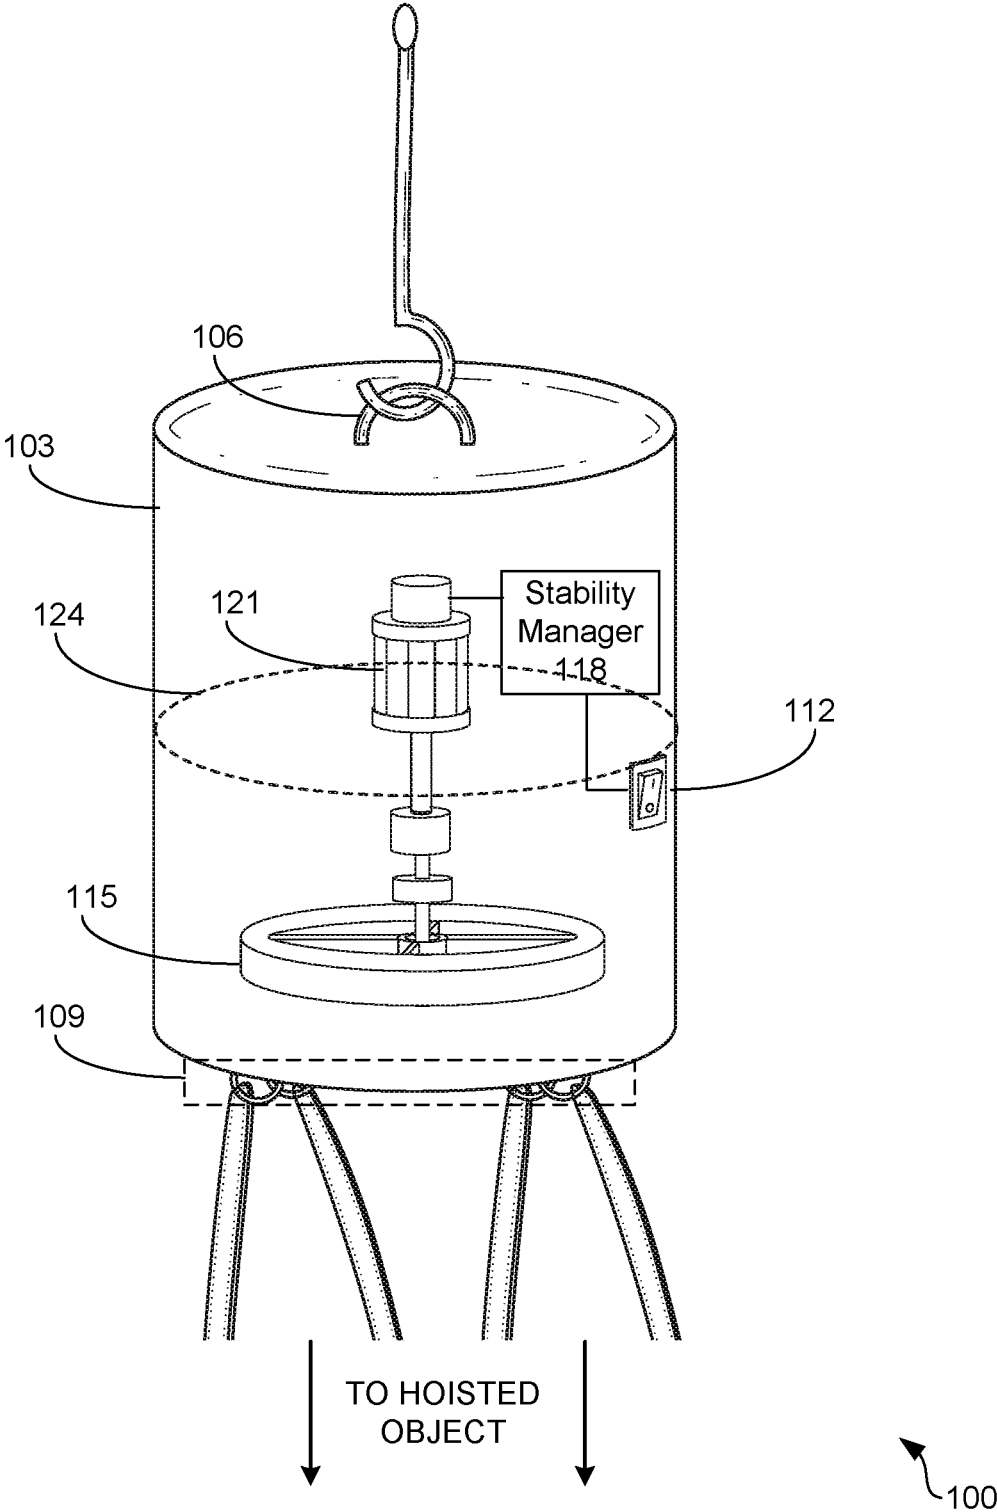


FIG. 1

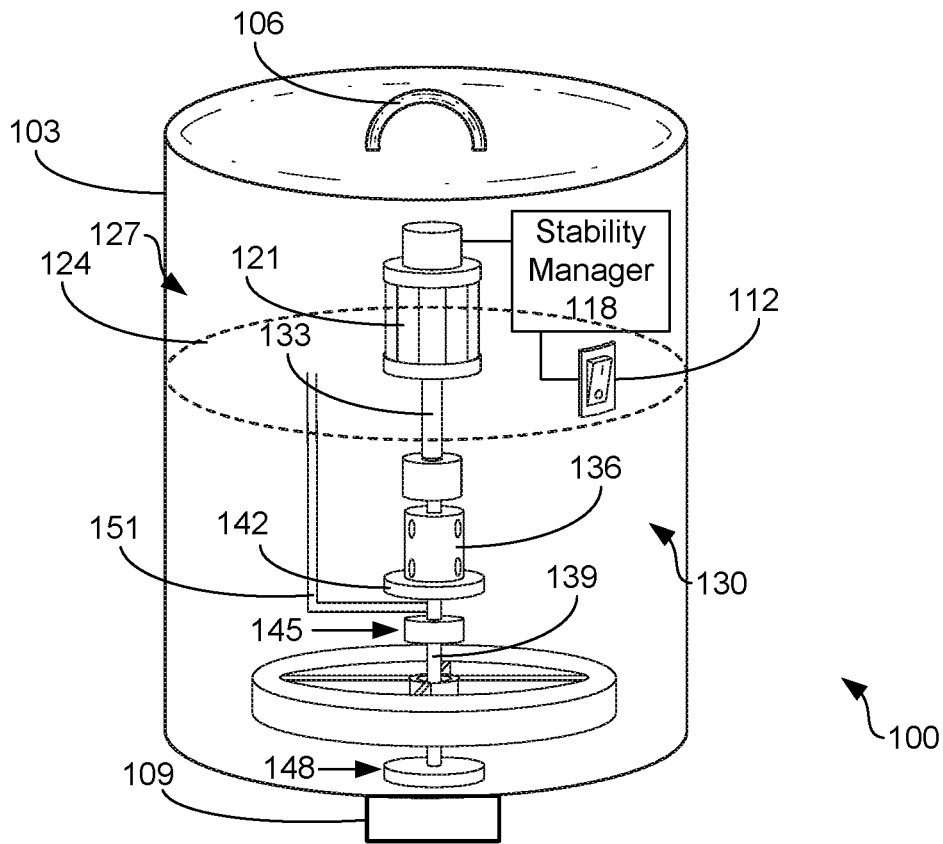


FIG. 2A

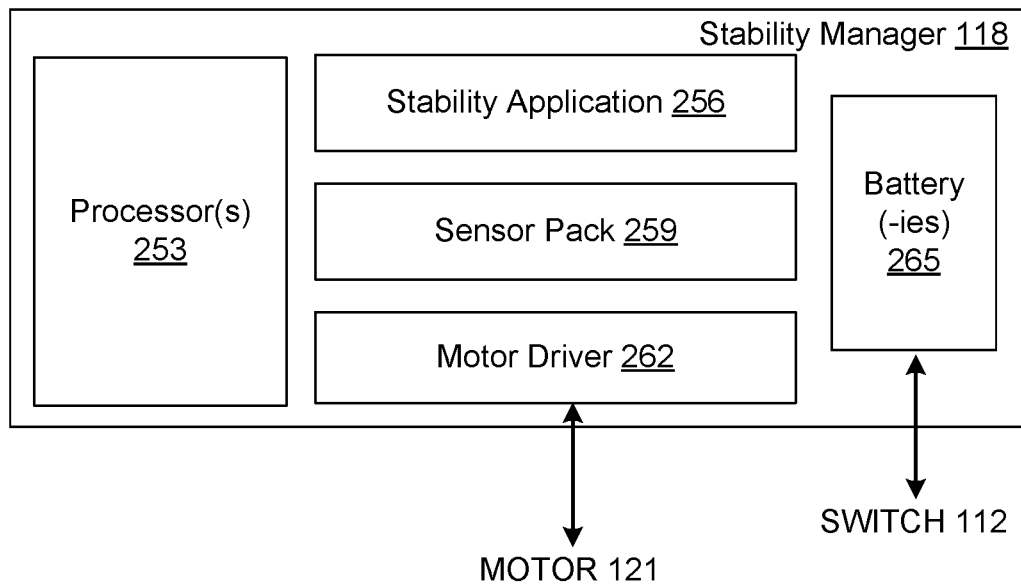


FIG. 2B

250

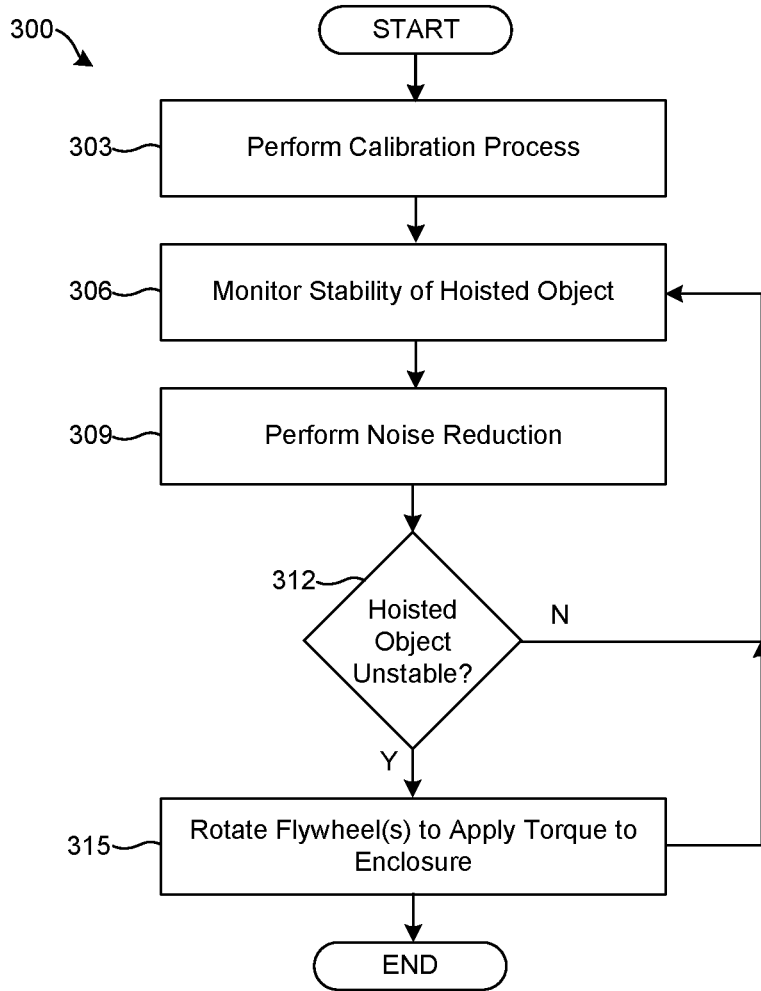


FIG. 3

DEVICE FOR STABILIZING A HOISTED OBJECT

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of and priority to U.S. Provisional Patent Application No. 62/677,177 entitled "FLYWHEEL-BASED MECHANISM FOR STABILIZING HELICOPTER HOISTS," filed May 28, 2018, the contents of which being incorporated herein by reference in their entirety.

BACKGROUND

Hoisted objects have a tendency to spin while being lifted under a helicopter. This spin is particularly problematic for aeromedical evacuations. The existing means of stabilizing a hoisted object are tag lines and active fins. A tag line is a line connecting the hoisted object to the ground. While the tag line can be simple and effective, it requires an individual on the ground to connect and disconnect the line. This limits the use of the tag line in certain environments. The active fin changes its angle of attack in response to an internal gyroscope which senses the angular velocity of an airframe. The protruding nature of the active fin off the airframe results in a tendency for the fin to fall to the ground mid operation. This is especially true when confronted with dense terrain. Existing methods for stabilizing a hoisted object during a helicopter hoist operation are thus less than ideal.

BRIEF DESCRIPTION OF THE DRAWINGS

Many aspects of the present disclosure can be better understood with reference to the following drawings. The components in the drawings are not necessarily to scale, emphasis instead being placed upon clearly illustrating the principles of the disclosure. Moreover, in the drawings, like reference numerals designate corresponding parts throughout the several views.

FIG. 1 shows an example of a device for stabilizing a hoisted object in accordance with various embodiments of the present disclosure.

FIG. 2A shows an example of a device for stabilizing a hoisted object in accordance with various embodiments of the present disclosure.

FIG. 2B shows an example block diagram of a stability manager of a device for stabilizing a hoisted object in accordance with various embodiments of the present disclosure.

FIG. 3 shows an example flow chart of a stability manager for a device for stabilizing a hoisted object in accordance with various embodiments of the present disclosure.

DETAILED DESCRIPTION

The present disclosure relates to a device that counteracts a spin of a hoisted object during a hoist operation. The device provides an alternative to a tag line and other conventional methods to counteract the spin of a litter that can occur when the litter is hoisted by a helicopter. In contrast to conventional methods of counteracting spin, the device described herein does not require hoist personnel to hold a tag line or otherwise maintain an ascertainable position during a hoist operation.

A hoist operation typically involves a helicopter or other aircraft with a hydraulic power unit (HPU) that reels a lift

line to the ground so that a hoisted object such as a litter can be attached to the lift line. In certain environments, the litter is a flexible stretcher such as a Skedco® Sked® stretcher, or the litter may be a metal frame basket such as a Stokes basket. The lift line from the helicopter includes a hook for connecting to the litter. Once the hook is connected to the litter, the HPU can reel the lift line in so that the litter can be retrieved. The design of a litter, various forces that exist during hoist operations, and other variables can cause the litter to spin prior to being retrieved.

It can be desirable to counteract the spin of a litter during a hoist operation without using a tag line. A tag line, such as the Skedco® Helitag Helicopter Tag Line Kit, is part of a manual process that involves an individual holding a rope that is connected to the litter. The manual process usually requires the individual to remain at a fixed point or otherwise ascertainable position, which can be problematic over water or in certain environments.

According to various embodiments described herein, a system, device, or method can include a stability manager or use thereof that may be employed as a component of a helicopter hoist operation to stabilize a hoisted object. The device of the present disclosure contains a switch that can be turned on by an individual on the ground who is responsible for connecting an enclosure containing the stability manager to the hoisted object, and turned off by an individual retrieving the hoisted object in the helicopter.

The enclosure is connected to the hoisted object, and therefore spins with the same angular velocity as the hoisted object. An inertial-measurement unit (IMU) can sense angular velocity of the enclosure. The IMU senses the angular velocity of the enclosure, and therefore by the nature of the connection between the enclosure and the hoisted object, the IMU senses a measurement that corresponds with the angular velocity of the hoisted object.

The device can include any number of motors, drivers, flywheels, and sensors, as well as a processor. The combination of motors being driven to turn flywheels induces the necessary stabilizing torque. Sensors read various measurements such as an angular velocity that corresponds with a hoisted object and provide those measurements to a processor. A control-feedback algorithm uses the angular velocity, and potentially acceleration, of the enclosure to inform how to control the flywheel. Ultimately, spinning the flywheel in the same direction as the hoisted object can help to stabilize the hoisted object.

Two categories of control-feedback algorithms can be used towards this purpose: proactive and reactive. The proactive algorithm can include the addition of a load sensor to determine the angular momentum of the hoisted object. A load sensor can also be useful when aspects of the geometry and the mass distribution of a hoisted object are known. The angular momentum informs the selection of the angular velocity of the flywheel to counteract the angular momentum of the hoisted object. Alternatively, a reactive approach can be used where the flywheel increases or decreases in velocity depending on the current rotation of the hoisted object.

Turning to the drawings, FIG. 1 shows an example of a device **100** for stabilizing a hoisted object in accordance with various embodiments of the present disclosure. The example device **100** includes an enclosure **103**, a line attachment **106**, a hoisted object attachment **109**, and a switch **112**.

As the enclosure **103** can be formed from any suitable type(s) of material to meet or exceed United States Military Standards and/or other design specifications. The enclosure

103 can resist shock damage, corrosion, and other environmental effects. The enclosure **103** can be formed of non-conductive material such as polyvinyl chloride (PVC). It is envisioned that the enclosure **103** can also include a conductive material such as metal or steel to discharge static electricity. The enclosure **103** provides a line attachment **106** for connection to a lift line reeled down from a helicopter, and a hoisted object attachment **109** for connection up from the hoisted object. A steel wire or other conductive material connects to a hook of the lift line to discharge static electricity from the helicopter.

The line attachment **106** includes a connection point to attach to a hook of a lift line. The hoisted object attachment **109** includes two or more connection points to connect to a hoisted object through two or more straps or lines. The hoisted object can be a Skedco® Sked® litter with a horizontal lift sling that has a head strap and a foot strap. This hoisted object provides four attachment points (e.g., two loops creating four ends).

In some examples, the hoisted object attachment **109** allows the attachment points of the hoisted object to collect together and meet at one connection point. Alternatively, the hoisted object attachment **109** allows ends or connections from the hoisted object to connect to the device **100**. In either of these examples, the hoisted object attachment **109** thus provides an attachment such that that the device **100** rotates about an axis formed by the lift line to the extent to which the hoisted object rotates. The hoisted object attachment **109** also allows straps of the hoisted object to be attached to the enclosure **103** without having to modify the straps.

Next, an example operation of the device **100** stabilizing a hoisted object is described. The switch **112**, for example a rocker switch, can be actuated to cause the device **100** to begin stabilizing a hoisted object and to counteract a spin of the hoisted object during a hoist operation. The device **100** depicted in FIG. 1 includes a flywheel **115** and various other components that will be described in further detail below.

Operation of the device **100** applies torque to the enclosure **103** thus reducing angular momentum of the spinning hoisted object. The device **100** can be calibrated so that operation of the device **100** allows the flywheel **115** to have a similar angular momentum as the hoisted object, thus storing the angular momentum of the hoisted object by transferring it to the flywheel **115**.

In operation, the stability manager **118** can be electrically connected to the motor **121** and the switch **112**. The stability manager **118** can be implemented with hardware, firmware, software executed by hardware, or a combination thereof. For example, the stability manager **118** can include processing circuitry including a processor and a memory, both of which can be coupled to a local interface such as, for example, digital and/or analog input-output pins as can be appreciated by those with ordinary skill in the art. The stability manager **118** can include software that configures the processor to use the input-output pins to interface with various components.

A stability application **256** (FIG. 2B) may be executed by the processor **253** (FIG. 2B) to monitor stability of the hoisted object and adjust the angular velocity of the flywheel **115** to stabilize the hoisted object. The stability manager **118** can also include one or more network interfaces for communicating with the various components. Communications can be through a network such as, but not limited to, a WLAN, cellular network, Bluetooth®, or other appropriate communication network. The stability manager **118** may

comprise, for example, a system such as a microcontroller, a system on chip, integrated circuit, or other system with like capability.

The stability manager **118** reads a measurement corresponding to an angular momentum of the hoisted object while the lift line is retrieved by the HPU. A processor **253** (FIG. 2B) of the stability manager **118** runs the measurement through a PID loop in a stability application **256** (FIG. 2B) of the stability manager **118**. The stability application **256** can select a value for a voltage across the motor **121** that causes the motor **121** to spin. Operation of the device **100** results in a torque to counteract the spin of the hoisted object.

The device **100** can stabilize the hoisted object by using one adjustment or by using multiple adjustments. If the hoisted object is rotating clockwise (or counter-clockwise), the device **100** can cause the flywheel **115** to rotate clockwise (or counter-clockwise). The stability application **256** can get a measurement for angular velocity from an IMU of the sensor pack **259** (FIG. 2B) and continue to adjust the voltage to drive the motor **121**, which adjusts the angular velocity of the flywheel **115**. The stability application **256** can continue to get measurements to determine that the angular velocity of the hoisted object gets closer and closer to zero. The process can continue until the hoisted object stops spinning or until the spinning is within a defined tolerance. The stability application **256** can allow the flywheel **115** to spin freely.

Operation of the device **100** can result in a torque to counteract the spin of the hoisted object, due in part to the motor **121** being rigidly connected to the blind flange **124**, which is itself rigidly connected to the enclosure **103**. In some examples, the motor **121** and/or a portion of a stabilizer assembly of the device **100** can be rigidly connected directly to the enclosure **103**. The device **100** can cause the motor **121** to apply a torque to the enclosure **103** and stabilize the hoisted object.

Referring now to FIG. 2A, shown is an example of a device **100** for stabilizing a hoisted object in accordance with various embodiments of the present disclosure. The enclosure **103** includes a blind flange **124** which creates a top compartment **127** and a bottom compartment **130** within the enclosure **103**.

The top compartment **127** houses a stability manager **118** (as also depicted in FIG. 2B). The stability manager **118** can adjust the voltage that drives the motor **121** (e.g., using a proportional-integral-derivate (PID) control or other feedback control algorithm, which is being represented by stability application **256** in FIG. 2B). The stability application **256** takes data from an IMU of the sensor pack **259** (FIG. 2B), feeds the data into the PID algorithm, and determines a desired angular velocity for the motor **121**, which the motor driver **262** can carry out on the motor **121**.

While the stability manager **118** (and the IMU) is depicted on the inside of the enclosure **103**, the IMU could also be on the outside of the enclosure **103** or located remotely from the enclosure **103**. The IMU can be placed in a location that will allow the IMU to provide accurate measurements, such as near to an axis on which the enclosure **103** and/or the hoisted object is rotating. The enclosure **103** can, for example, be spinning about an axis formed by the lift line attached to the enclosure **103**.

The device **100** includes a stabilizer assembly where a portion of the stabilizer assembly can be rotated to reduce the angular velocity of the hoisted object. The stabilizer assembly includes the motor **121** as well as various components housed within the bottom compartment **130**. The

stabilizer assembly is configured to transfer a torque to the hoisted object. For example, the hoisted object is connectable to the hoisted object attachment 109 of the enclosure 103. The motor 121 can be mounted to the blind flange 124 that is rigidly connected to the enclosure 103. Drive of the motor 121 can cause a torque to be transferred to the hoisted object by the nature of the connection between the enclosure 103 and the hoisted object.

The motor 121 can be mounted so that a first drive shaft 133 coming off the motor 121 protrudes through the blind flange 124. The motor driver 262 (FIG. 2B) drives the motor 121 based on the output from the stability application 256. The motor 121 is connected to the flywheel 115. The drive of the motor 121 causes the flywheel 115 to spin in the same direction as the hoisted object.

The bottom compartment 130 houses the portion of the first drive shaft 133 that protrudes through the blind flange 124 and connects to the shaft coupler 136. The shaft coupler 136 is used to connect the first drive shaft 133 and a second drive shaft 139 that is connected to the flywheel 115. The shaft coupler 135 can join the first drive shaft 133 and the second drive shaft 139 to permit transfer of rotation, while also permitting movement or angular misalignment between the first drive shaft 133 and the second drive shaft 139. For example, the shaft coupler 136 can permit about two to three degrees of angular misalignment. A second drive shaft 139 is connected to the shaft coupler 136 and the flywheel 115. An encoder 142 is provided so that the stability manager 118 can sense how quickly the second drive shaft 139 is spinning. A first shaft collar 145 and a second shaft collar 148 can hold the flywheel 115 in place. The bracket 151 mounts the shaft coupler 136 to a head of the motor 121 and/or the blind flange 124. The shaft coupler 136 counteracts any tilting of components of the device 100.

A weight of the flywheel 115 can be selected based on how quickly it is desired for the flywheel 115 to turn and how quickly the flywheel 115 accelerates. For example, a flywheel 115 can be between about five and twenty pounds. It is also envisioned that the device 100 could include multiple flywheels 115. The device 100 can spin the flywheel 115 in the same direction as the hoisted object is spinning. The device 100 can apply a torque to the enclosure 103 which will then transfer to the hoisted object and counteract the spinning of the hoisted object. Additionally, controlling multiple flywheels 115 in multiple axis can lead to stabilization in multiple axis. Controlling multiple flywheels 115 can allow the device 100 to stabilize a hoisted object that is oscillating back and forth, spinning about a fixed axis, etc.

Although an electromechanical rocker switch 112 is depicted in FIG. 2A, other types of switches are envisioned. One purpose of the switch 112 is to preserve the battery life of the device 100 (in the off position) and to start current flowing into the stability manager 118 (in the on position). The switch 112 could be a wireless or remote control switch that can achieve an off state when it is not desired for the device 100 to stabilize the hoisted object, and an on state when it is desired for the device 100 to stabilize the hoisted object. The switch 112 could determine if the hoisted object is being hoisted and then switch to an on or active position. When the hoisted object is no longer being hoisted, the switch 112 could switch to an off or inactive position. Additionally, conductive material runs from the line attachment 106 to the hoisted object attachment 109 to discharge static electricity from the helicopter.

With reference now to FIG. 2B, shown is an example block diagram 250 of a stability manager 118 of a device 100

for stabilizing a hoisted object in accordance with various embodiments of the present disclosure. The stability manager 118 can include a processor 253, a stability application 256, a sensor pack 259, a motor driver 262, and a battery 265 or other power supply. The motor driver 262 is the connection point from the processor 253 to the motor 121. For example, the motor driver 262 can be a hardware interface that the processor 253 uses to control the speed and the direction of the motor 121 by controlling an input voltage to the motor 121.

The sensor pack 259 can include one or more sensors. In some examples, the sensor pack 259 includes an inertial measurement unit (IMU) that comprises the one or more sensors. Sensors can include an accelerometer, a gyroscope, a magnetometer, or a device that measures a force, angular rate, or magnetic field. The sensor pack 259 can also be electrically connected to the encoder 142 that detects rotation at some sensor point such as around the second drive shaft 139. The IMU of the sensor pack 259 detects angular velocity and angular acceleration. The stability manager 118 can thus sense rotation of the enclosure 103 via the IMU and detect rotation of the flywheel 115 using the encoder 142.

The stability application 256 can include a proportional-integral-derivative (PID) controller that implements a control algorithm. The stability application 256 reads at least one measurement (angular velocity) from the sensor pack 259 and outputs a voltage based on a velocity and/or direction to cause the flywheel 115 to spin. The stability application 256 can continue to get measurements to determine that the angular velocity of the hoisted object gets closer and closer to zero.

With reference to FIG. 3, shown is a flowchart 300 that shows steps of a method implemented by the stability manager 118. Alternatively, FIG. 3 provides one example of the execution of a stability application 256 of a device 100 for stabilizing a hoisted object in accordance with various embodiments of the present disclosure. FIG. 3 can also be seen as example flowchart 300 for a control system for a device 100 for stabilizing a hoisted object in accordance with various embodiments of the present disclosure.

Accordingly, at box 303, the stability manager 118 can perform a calibration process for stabilizing the hoisted object. For example, the stability application 256 can use a calibration process to obtain a reference point or calibration constants. For example, a point relative to an initial orientation (relative orientation), a position (absolute position), or relative to magnetic north (absolute orientation) can be obtained by input from an operator or by reading one or more values from the sensor pack 259. Prior to the hoist operation while the device 100 is stable, the device 100 can be calibrated.

At box 306, the stability manager 118 can set a threshold for the stability operation. For example, the stability application 256 can set a defined number of revolutions per second below which a hoisted object is deemed to be stable. The stability application 256 can monitor the sensor pack 259, as calibrated in box 303. For example, the stability application 256 can obtain from the sensor pack 259 a measurement that corresponds with the angular velocity of the hoisted object. Accordingly, with the sensor pack 259 in place, the rotation of the enclosure 103 and/or the hoisted object can be sensed.

At box 309, the stability application 256 can perform a noise reduction analysis on one or more measurements obtained from the sensor pack 259. The analysis uses the processor 253 to compute one or more reduced samples based on measurement(s) obtained from the sensor pack

259. For example, a sensor pack 259 having a 200 Hz IMU would have a sample period of 5 milliseconds. The reduced samples can be based on a sample period that is greater than 5 milliseconds. One benefit of the noise reduction is to reduce the likelihood that the device 100 will overcompensate for a spin or jerk the hoisted object.

At box 312, the stability application 256 can determine whether the hoisted object is unstable. The hoisted object attachment 109 of the enclosure 103 is connected to the hoisted object, and therefore spins with the same angular velocity as the hoisted object. The IMU of the sensor pack 259 can sense angular velocity of the enclosure. The IMU senses the angular velocity of the enclosure 103, and therefore by the nature of the connection between the enclosure 103 and the hoisted object, the IMU senses a measurement that corresponds to the angular velocity of the hoisted object.

For example, if the sensor pack 259 detects a measurement that is above a threshold defined in box 303, this condition can be associated with an unstable hoisted object. The stability application 256 can determine that the hoisted object is unstable because it is spinning in one axis. If the stability application 256 determines that the hoisted object is unstable, the process continues to box 315.

If the stability application 256 determines that the stability of the hoisted object is within a threshold, this condition can be associated with a hoisted object that is stable. The stability application 256 can determine that the hoisted object is no longer spinning, or that the hoisted object is spinning within a tolerance of at least one sensor making up the sensor pack. The stability application 256 can also determine that the hoisted object is spinning less than a fixed number of revolutions per second. If the hoisted object is stable, then the process can return to box 306. Alternatively, in some implementations, the process can end if the hoisted object is considered stable.

At box 315, the stability application 256 can adjust voltage of the motor 121. The stability application 256 can instruct the motor driver 262 to drive the motor 121 and rotate at least one drive shaft attached to the flywheel(s) 115. Driving the motor 121 can result in the application of torque to the enclosure 103. The stability application 256 integrates measurements from the IMU of the sensor pack 259 so that angular velocity input informs the velocity and direction of the flywheel 115.

The stability application 256 can implement a PID controller to adjust the voltage of the motor 121 due to at least one measurement detected by the sensor pack 259. For example, the voltage of the motor 121 can be adjusted based on the direction and the angular velocity of the hoisted object. The voltage of the motor 121 can be controlled so the angular velocity of the flywheel 115 counteracts the angular momentum of the hoisted object. For example, the PID controller can implement a control equation (1) where V is the output voltage to the motor 121, ω is the difference between the angular velocity of the hoisted object about the z-axis compared to desired angular velocity. The k_p , k_i , and k_d values can be selected. Thereafter, the process can return to box 306. Alternatively, in some implementations, the process can proceed to completion.

$$V = k_p \omega + k_i \int \omega dt + k_d \frac{d\omega}{dt} \quad (1)$$

Although the flowchart of FIG. 3 shows a specific order of execution, it is understood that the order of execution may

differ from that which is depicted. For example, the order of execution of two or more blocks may be scrambled relative to the order shown. Also, two or more blocks shown in succession in FIG. 3 may be executed concurrently or with partial concurrence. Further, in some embodiments, one or more of the blocks shown in FIG. 3 may be skipped or omitted (in favor, e.g., conventional scanning approaches). In addition, any number of counters, state variables, warning semaphores, or messages might be added to the logical flow described herein, for purposes of enhanced utility, accounting, performance measurement, or providing troubleshooting aids, etc. It is understood that all such variations are within the scope of the present disclosure.

Also, any logic or application described herein, including the stability manager 118, and the stability application 256, can be implemented using dedicated circuitry or implemented using hardware and software such as a microcontroller and software running on the microcontroller.

The device 100 can be formed from any suitable type(s) of materials to meet or exceed United States Military Standards and/or other design specifications. While the device 100 is depicted as attached above the litter or hoisted object, the device 100 could also be connected to (or inside of) a bottom of the litter. The device 100 can thus be fitted to any litter.

Although embodiments have been described herein in detail, the descriptions are by way of example. The features of the embodiments described herein are representative and, in alternative embodiments, certain features and elements may be added or omitted. Additionally, modifications to aspects of the embodiments described herein may be made by those skilled in the art without departing from the spirit and scope of the present invention defined in the following claims, the scope of which are to be accorded the broadest interpretation so as to encompass modifications and equivalent structures.

Disjunctive language such as the phrase “at least one of X, Y, or Z,” unless specifically stated otherwise, is otherwise understood with the context as used in general to present that an item, term, etc., may be either X, Y, or Z, or any combination thereof (e.g., X, Y, and/or Z). Thus, such disjunctive language is not generally intended to, and should not, imply that certain embodiments require at least one of X, at least one of Y, or at least one of Z to each be present.

It should be emphasized that the above-described embodiments of the present disclosure are merely possible examples of implementations set forth for a clear understanding of the principles of the disclosure. Many variations and modifications may be made to the above-described embodiment(s) without departing substantially from the spirit and principles of the disclosure. All such modifications and variations are intended to be included herein within the scope of this disclosure and protected by the following claims.

Therefore, the following is claimed:

1. A stabilizer device for stabilizing a hoisted object, comprising:

a stabilizer assembly configured to transfer a torque to a hoisted object connectable to an enclosure of the stabilizer device; and

a stability manager comprising:

a sensor pack configured to obtain a measurement that corresponds to an angular velocity of the hoisted object, wherein the sensor pack comprises:

an inertial measuring unit (IMU), wherein the IMU senses an angular velocity of the enclosure of the stabilizer device, wherein the angular velocity of the

enclosure of the stabilizer device corresponds to the angular velocity of the hoisted object;
 a load sensor to determine an angular momentum of the enclosure and the hoisted object; and
 an encoder configured to detect a rotation of at least a first driveshaft and a flywheel, wherein the first driveshaft is coupled to the flywheel;
 a motor driver configured to drive a motor;
 a processor; and

program instructions stored in memory and executable by the processor that, when executed, cause the stability manager to determine that hoisted object is unstable based on the measurement that corresponds to an angular velocity of the hoisted object, and to use the motor driver to determine the angular momentum of the enclosure and the hoisted object, select a selected angular velocity of the flywheel to reduce the angular velocity of the hoisted object based at least in part on the angular momentum of the enclosure and the hoisted object, and rotate at least the flywheel at the selected angular velocity, according to the rotation of at least the first driveshaft and the flywheel detected by the encoder, to reduce the angular velocity of the hoisted object.

2. The stabilizer device of claim 1, wherein the stabilizer assembly comprises a shaft coupler connected to a second driveshaft connected to the motor and the second driveshaft connected to the flywheel, the shaft coupler configured to permit two to three degrees of angular misalignment between the first driveshaft and the second driveshaft.

3. A device for stabilizing a hoisted object, comprising:
 an enclosure comprising a line attachment configured to attach to a lift line and a hoisted object attachment configured to attach to a hoisted object;
 a stabilizer assembly comprising a motor connected to a flywheel by at least a first driveshaft; and
 a stability manager connected to the motor, the stability manager configured to apply a torque to the enclosure to reduce an angular velocity of the hoisted object; wherein

the stability manager comprises:

a processor, a memory, a motor driver, and a sensor pack configured to obtain a measurement corresponding to the angular velocity of the hoisted object;

wherein the sensor pack comprises:

an inertial measurement unit (IMU), wherein the IMU senses an angular velocity of the enclosure, wherein the angular velocity of the enclosure corresponds to the angular velocity of the hoisted object;

a load sensor to determine an angular momentum of the enclosure and the hoisted object; and
 an encoder configured to detect a rotation of at least the first driveshaft and the flywheel; and

program instructions stored in the memory and executable by the processor that, when executed, cause the stability manager to determine that hoisted object is unstable based on the measurement that corresponds to an angular velocity of the hoisted object and to use the motor driver to determine the angular momentum of the enclosure and the hoisted object, select a selected angular velocity of the flywheel to reduce the angular velocity of the hoisted object based at least in part on the angular momentum of the enclosure and the hoisted object, and rotate at least the flywheel at the selected angular velocity, according to the rotation of at least the

first driveshaft and the flywheel detected by the encoder, to reduce the angular velocity of the hoisted object.

4. The device of claim 3, wherein the stability manager causes the motor driver to cause the motor to rotate the first driveshaft.

5. The device of claim 3, wherein the motor is mounted such that the first driveshaft rotates the flywheel about an axis formed by a lift line attached to the line attachment.

6. The device of claim 3, wherein the motor is mounted to a blind flange that is rigidly connected to the enclosure.

7. The device of claim 6, wherein the first driveshaft comprises a portion of a second driveshaft that protrudes through the blind flange and connects to a shaft coupler, and a third driveshaft connected to the shaft coupler and the flywheel, the device further comprising the encoder or a second encoder that can detect how quickly the third drive-shaft is spinning.

8. A method for stabilizing a hoisted object, comprising:
 obtaining, from a sensor pack, at least one measurement corresponding to an angular velocity of a hoisted object, wherein the at least one measurement is obtained from an inertial measurement unit (“IMU”) secured to an enclosure of a stabilizer device, wherein the IMU senses an angular velocity of the enclosure of the stabilizer device, wherein the angular velocity of the enclosure of the stabilizer device corresponds to the angular velocity of the hoisted object;

determining that the hoisted object is unstable based on the at least one measurement corresponding to the angular velocity of the hoisted object; and

in response to determining that the hoisted object is unstable, rotating at least a portion of a stabilizer assembly of the stabilizer device to reduce the angular velocity of the hoisted object;

wherein the sensor pack further comprises a load sensor to determine an angular momentum of the enclosure and the hoisted object and wherein the stabilizer assembly further comprises at least one driveshaft coupled to a flywheel and wherein the sensor pack further comprises an encoder configured to detect a rotation of the at least one driveshaft and the flywheel, and wherein the method further comprises determining the angular momentum of the enclosure and the hoisted object, selecting a selected angular velocity of the flywheel to reduce the angular velocity of the hoisted object based at least in part on the angular momentum of the enclosure and the hoisted object, and rotating at least the flywheel at the selected angular velocity, according to the rotation of the at least one driveshaft and the flywheel detected by the encoder, to reduce the angular velocity of the hoisted object.

9. The method of claim 8, wherein determining that the hoisted object is unstable comprises determining that the at least one measurement exceeds a threshold.

10. The method of claim 9, wherein the threshold comprises a defined number of revolutions per second.

11. The method of claim 8, wherein the stabilizer assembly further comprises a motor and the flywheel connected to a shaft coupler, the shaft coupler configured to permit about two to three degrees of angular misalignment between the motor and the flywheel.

12. The method of claim 8, wherein determining that the hoisted object is unstable comprises determining that the angular velocity of the hoisted object is not zero and further comprising in response to determining that the angular velocity of the hoisted object is not zero and based on the

angular velocity of the enclosure of the stabilizer device and
a direction of the angular velocity of the enclosure of the
stabilizer device, outputting a proportionate voltage to a
motor, wherein the motor is secured to the stabilizer device
and a driveshaft of the motor is coupled to the flywheel, 5
wherein the flywheel is the portion of the stabilizer assembly
of the stabilizer device, wherein the proportionate voltage to
the motor results in rotating the flywheel in the same
direction as the hoisted object and wherein rotating the
flywheel in the same direction as the hoisted object reduces 10
the angular velocity of the hoisted object toward zero.

* * * * *